



109415-2

79-93 Fox Body Mustang to GM LS & 4L60/65, TKO Conversion Kit

Direct bolt in kit includes two solid engine mounts and a bolt in transmission cross member to install a GM LS with either a 4L60-65 or TKO Transmission. All hardware included. To be used with Stock GM transmission mount or polyurethane equivalent.

At Tin Man Fabrication we have taken pride in providing a very high quality product that can fit the needs of many applications. A complete list of Tin Man products is available on our website at www.tinmanfabrication.com.



Thank you for your purchase!
Call 877-866-2338 for Technical Help.

Hardware:

Motor Mounts

6 – 3/8 – 16 x 3/4” bolts, lockwashers

2 – 1/2 - 13 x 1 1/4” bolts, lockwashers, USS flat washers, nuts

Crossmember

2 – 3/8 – 16 x 6 1/2, Bolt & serrated flange nut

2 – 3/4” bushings

2 – 1” bushings

2 – 2 1/2” bushings

Other Tin Man products to consider:

Fox Mustang mid length Sub Frame Connectors

Tin Man Fabrication

21461 Aberdeen St NE, East Bethel, MN 55011
www.tinmanfabrication.com

Phone: 763-753-4265
Toll free: 877-866-2338
1/2019




109415-2


79-93 Fox Body Mustang to GM LS & 4L60/65, TKO Conversion Kit

NOTES:

1. ALL DIMENSION TOLERANCE ± 0.020 UNLESS NOTED.

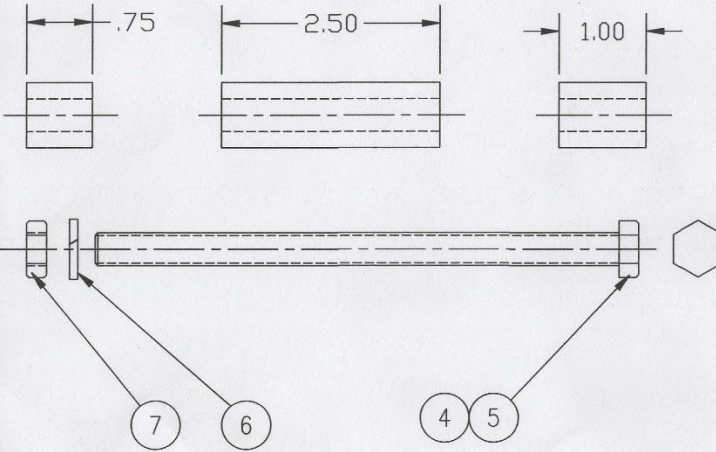

| ITEM # | MAT'L TYPE | SIZE/DESCRIPTION | QTY |
|--------|------------|---|-----|
| 1 | 1018 CRS | ϕ .75 O.D. X ϕ 3/8 I.D. X .75" LG, | 2 |
| 2 | 1018 CRS | ϕ .75 O.D. X ϕ 3/8 I.D. X 2.50" LG, | 2 |
| 3 | 1018 CRS | ϕ .75 O.D. X ϕ 3/8 I.D. X 1.0" LG, | 2 |
| 4 | - | 3/8-16NC X 6" LG. HHCS BOLT | 2 |
| 5 | - | 3/8-16NC X 7" LG. HHCS BOLT | 2 |
| 6 | - | 3/8 LOCK WASHER | 2 |
| 7 | - | 3/8-16NC HEX NUT | 2 |

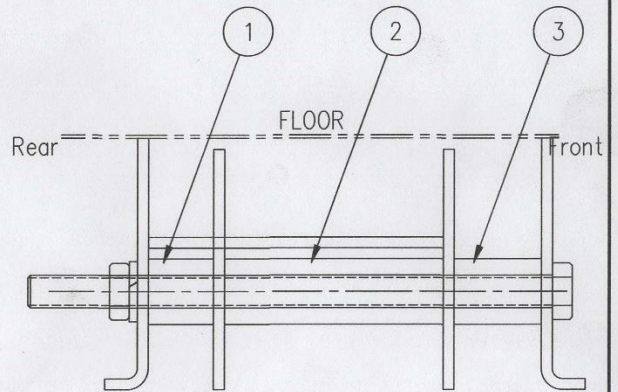

| | | | | | |
|-------|------|--|---|-----|--|
| X | X | X | X | X | |
| LEVEL | DATE | | BY | APP | |
| | | 21461 Aberdeen St NE East Bethel, MN 55011 Ph: (763) 753-4265 Builder and Fabricator of Quality Rods and Customs | ALL RIGHTS RESERVED ALL RIGHTS TO THIS DRAWING ARE HELD AT ALL TIMES BY TINMAN FABRICATION INC. & NO PORTION OF THIS DRAWING MAY BE COPIED, REPRODUCED, COMMUNICATED, OR RENDERED ACCESSIBLE TO THIRD PARTIES WITHOUT PRIOR WRITTEN CONSENT. | | |

| | | | |
|--|-----------------|-------------------------------------|-------------|
| EXCEPT AS NOTED: | | TITLE: Bushing Kit Fox/700R4 & 4L60 | |
| 1) ALL FINISHED SURFACES TO BE 125 MICRO IN. 2) BREAK ALL SHARP EDGES 3) TOLERANCES ON DIMENSIONS TO BE: FRACTIONAL +/- 1/16" DECIMAL .XX +/- .010" DECIMAL .XXX +/- .005" ANGULAR TOL. +/- 1 Degree | | DR BY: JRC | HRPO QTY: |
| CK BY: | FINISH: | NONE | SCALE: 1:22 |
| DATE: 12/17 | DWG. NO. 300294 | | REV/SHT |
| NXT ASSY | | | - 1/1 |